


SPEEDY BAND


Universal single-sided tape without separation layer

Polyethylene (PE) support with acrylic glue and reinforcing grid

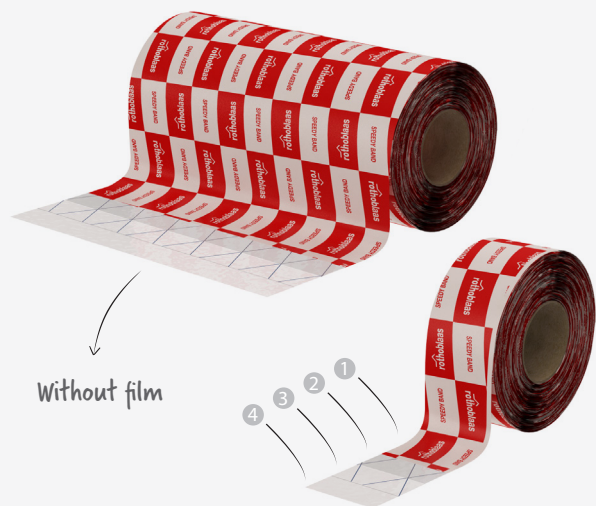



FAST INSTALLATION

Can be used both externally and internally, guarantees fast and secure sealing on the most common supports



SUSTAINABLE

The lack of separation layer means less waste

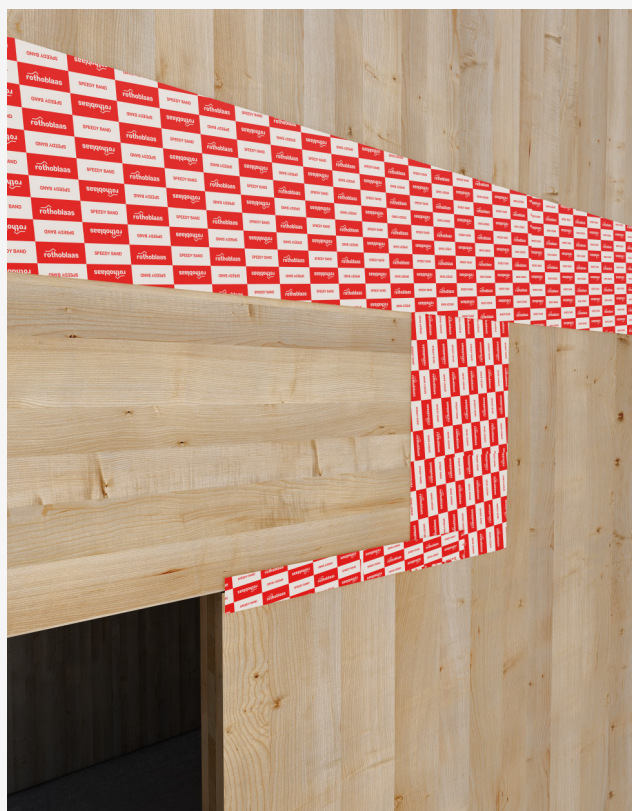

TECHNICAL SPECIFICATIONS

property	standard	value
Total thickness	AFERA 5006	0,25 mm
Adhesiveness on steel	AFERA 5001	> 27,5 N/25 mm
Adhesiveness on polyethylene	EN 12316-2	> 12,5 N/25 mm
Water vapour transmission (Sd)	EN 1931	40 m
Temperature resistance	-	-40 / +80 °C
Application temperature	-	-10 / +40 °C
UV resistance	-	6 months
Watertightness	-	conforming
Storage temperature	-	+5 / +25 °C
Solvents	-	NO
VOC emissions	-	0 % (class A+)

NOTE: Store the product in a dry, covered location

CODES AND DIMENSIONS

code	ex code	B [mm]	L [m]	pcs/box
SPEEDY60	D52124	60	25	10
SPEEDY300	-	300	25	2

COMPOSITION

- ① support: PE film
- ② glue: acrylate dispersion without solvents
- ③ reinforcing layer: reinforcing PE grid
- ④ glue: acrylate dispersion without solvents